




Safety switch standard version max. 10A

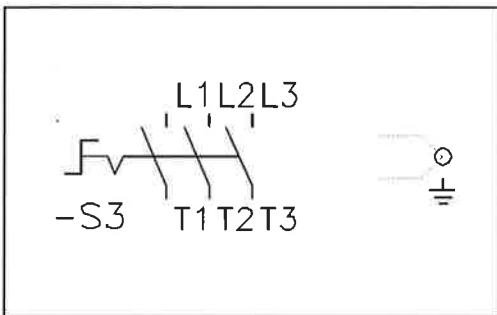


Safety switch EMC version with auxiliary contact suitable for frequency converter max. 10A

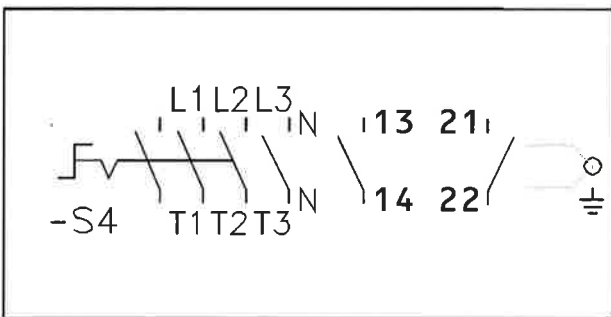


Safety switch Ex version with auxiliary contact max. 10A

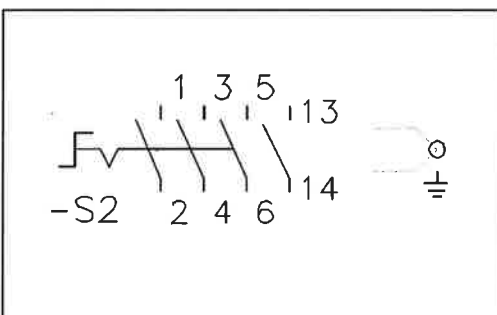


Safety switch Ex/EMC version with auxiliary contact suitable for frequency converter max. 10A

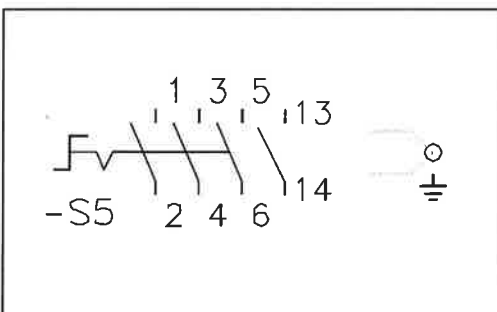


Safety switch standard version 2 speed max. 10A

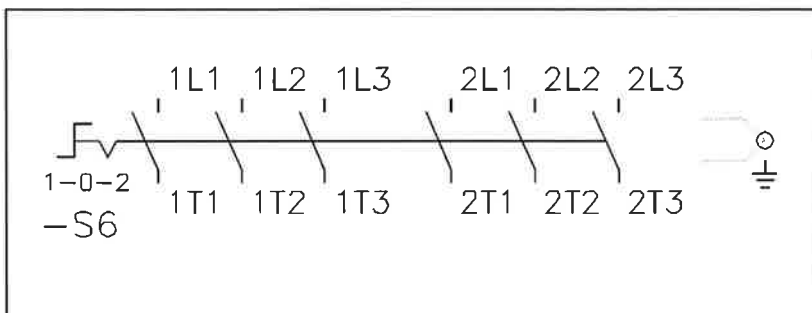


Wiring diagramm motor 1 speed without thermistor (PTC)

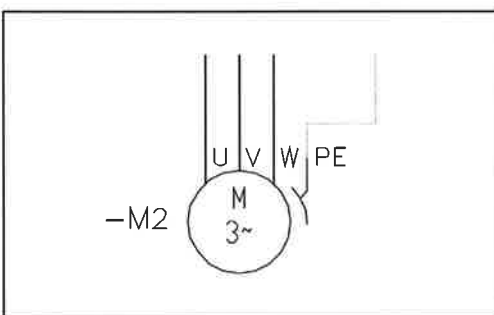


Wiring diagramm motor 1 speed with thermistor (PTC)

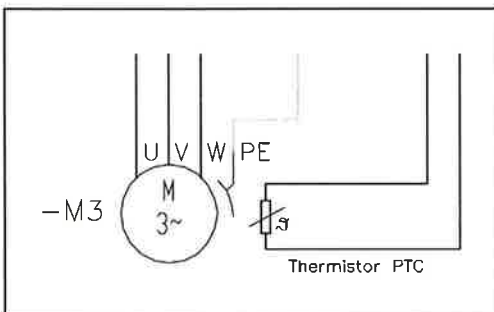


Wiring diagramm motor 2 speed without thermistor (PTC) (separated windings) 3 x 400V / 50 Hz

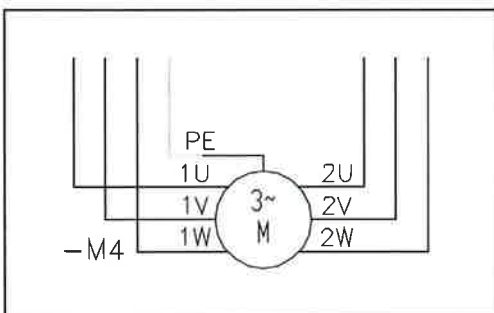

Wiring diagramm motor 2 speed with thermistor (PTC) (separated windings) 3 x 400V / 50 Hz

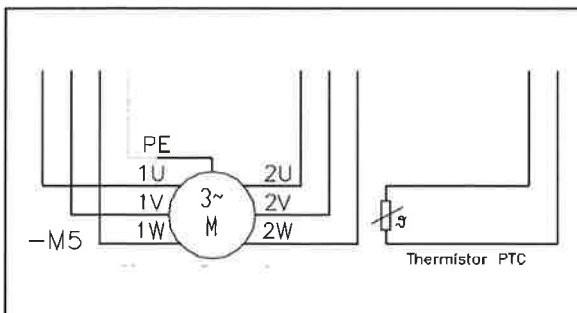

Terminal allocation 230/400 Volt

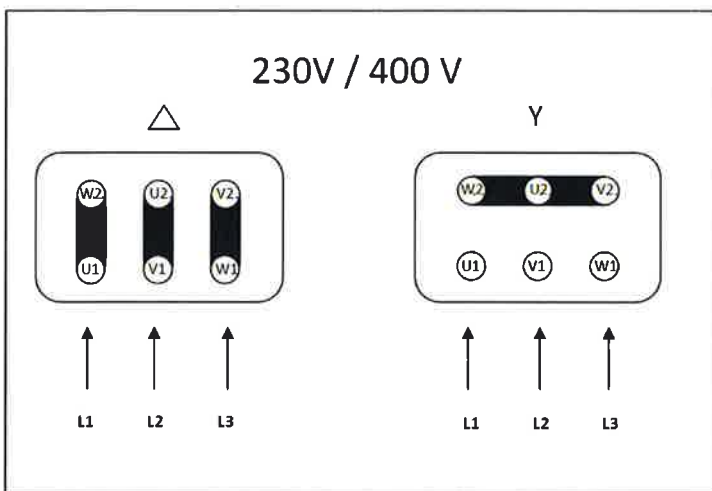

Terminal allocation 400/690 Volt

